


- Simple Spacer Design for rapid installation
- Atex Option Available
- Customer DBSE specification
- Compliance with API 610 - ISO 14691

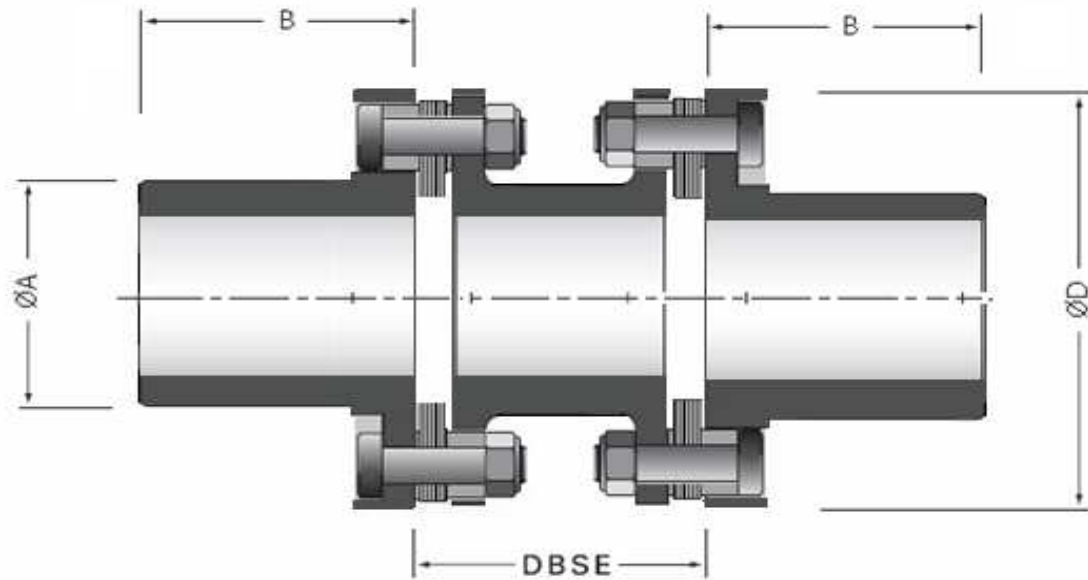

Coupling Size CSDN	Nominal Torque Nm	Peak Torque Nm	Max Bore mm	Min Bore mm	A mm	B mm	D OD mm	DBSE Min mm	Weight Kg	Max Speed Rpm
60	360	640	35	15	49	50	78	42	2.2	20000
80	940	1600	48	20	66	65	102	50	4.8	16500
100	1830	3200	60.3	20	83	80	127	63	9.6	12000
120	3300	5800	73	25	100.5	90	151	71	15.7	10000
140	5240	9000	85	30	117.5	95	175	79	22.6	8500
160	8000	14000	97.5	40	134.5	120	198	92	35.5	7500
180	11600	20000	110	50	151.5	125	225	105	47	6500
200	16290	28500	121	60	168	145	248	118	65	5600
220	22000	38000	133	80	184	160	281	135	85	4500

Notes...

Weight Calculated with Min DBSE and Min Bore